

# Billboard Video Wall 8 mm quality 151" high x 574" wide

**Product Code:** P8.5.19-108

**Availability:** 1000

**Weight:** 3.00kg

**Dimensions:** 0.00cm x 0.00cm x 0.00cm

**Price:** \$85,600.00



## Short Description

Static billboard these days go unnoticed! LED Video Wall Billboards are vibrant and bold. 24/7 customer service and a 3 year manufacturing warranty.

## Description

What is a Billboard without an LED Video Wall delivering multiple messages? The simple answer, is a static, one message billboard that you can only rent space to one advertiser. Capitalize on the money you've already spent for the steel structure and the labor to put it up, and add the ability to have several advertisements with the ability to push up illuminated single images OR full digital video on a grand scale. The entire point of a billboard is to grab the attention of the onlooker passing by. In the sea of billboards on the highways, how do you intend on doing that without LED? LED Video Walls are high impact, high-end and are extremely simple to connect too and we can cover your existing billboard with an experience that people talk about..

This is roughly a 14' x 48' system in 8mm quality. It's huge, waterproof and extremely vibrant! LED Wall Panels are changing the entire landscape of how different media is viewed. Seamless interlocking systems are quickly taking over the large format video world because of their ability to deliver video content on the largest format over any other system seamlessly and now their quality levels are undeniably gorgeous.

This system can be controlled up to 3 miles away directly, or over the web from anywhere.

If installation is needed, we have local techs and can estimate all costs up front so there

are no hidden fees for your budgeting purposes. We also offer service plans to maintain your system to ensure you get the most life out of your system. Just call us and ask for a free installation or service estimate.

Don't be fooled by manufacturers that do not offer warranties and long term service plans. We partner with our customers and are proud of how we serve focused on a long term and ever evolving future. We help our customers achieve the most out of their systems.

#### ITEM SPECIFICATIONS:

1. This is a 8mm system, which means the distance between each LED is 8mm so attendees should be 40' or more, away for optimal image clarity.
2. These panels can hot swap. This is an important cost saving fact. Many competing systems do not hot swap. Hot swap means if, for some reason something struck and damaged a panel and it needed replacing, hot swap allows you to just remove that one panel without having to take all the panels above it apart. This saves a lot of labor time and more importantly labor costs when replacing.

When buying from LED Tranquility you get the following with your system:

1. 3 year manufacturer warranty (INCLUDED) on all equipment (specific to manufacturing defects)
2. 24/7 customer service by phone (INCLUDED) with any of our trained LED Tranquility technicians (for the life of the product)
3. A hot swap system (INCLUDED) of superior quality that saves you money long term
4. Peace of mind that you bought from a great US based company that is here to support you

These systems come with full installation instruction and can be installed by experienced A/V technicians. IF YOU WANT LED TRANQUILITY TO INSTALL THIS SYSTEM FOR YOU (HIGHLY RECOMMENDED) PLEASE CALL FOR AN ESTIMATE AS ESTIMATES FOR INSTALLATION ARE BASED ON LOCATION AND CANNOT BE PRICED THROUGH A WEBSITE.


#### **Specifications**

# LED VIDEO WALL (8 mm quality) - OUTDOOR BILLBOARD



EXAMPLE

Add or subtract panels to make any size needed!

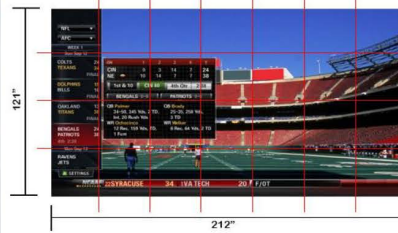

## Per Panel Specifications

Cabinet	Size	30.2362 inch x 30.2362 inch	Screen and Control System	LED Expected Life	greater than 100,000 hours
	Resolution	96 dots x 96 dots		Input Voltage	120V 1p to 220V 3p
	Weight	36.3757 pounds		Input Frequency	50/60Hz
Pixel Pitch (mm)	8mm	Power Consump		Max: 800w Avg: 270w	
Pixel Density	15625	Refresh Rate		greater than 1920Hz	
Brightness	greater than 6000	Frame Rate		greater than 60 frames/sec	
Module Size	10.0787 inch x 5.0394 inch	Defect Rate		less than .0001	
Resolution	32 x 16	Humidity		0 - 90%	
Weight	0.7716 pounds	Control Method		Video Processor or Computer	
Pixel Config	1R1G1B	Way of Drive		1/4 scan	
Connector	Linco Brand	MTBF		greater than 50,000 hours	
LED Lamp	SMD3535	Color Temp		6500K	
Driver IC	MB15124	Color	greater than 16.7 million		
Power Supply	G-energy	Support Mode	VGA, 800x800 display		
Viewing Angle	140 degrees	Control Distance	400 feet (optical up to 3 miles)		
Brightness	greater than 6000	Operating Platform	WINDOWS (98, 2000, XP, 7)		
Control System	Brightness Adjust	Manual, 256 level; Auto 8 level			
	Grey Scale	256 Shades Per Color			
	Grey levels	16 bits			
	Operating Temp	neg 20 Fahr to pos 140 Fahr			

Individual Panels



Signal Connection

Power Connr



**LED Tranquility**<sup>®</sup>  
THE TRUSTED SOURCE OF VIDEO WALL TECHNOLOGY