

Billboard Video Wall 8 mm quality 151" high x 574" wide

Product Code: P8.5.19-108

Availability: 1000

Weight: 3.00kg

Dimensions: 0.00cm x 0.00cm x 0.00cm

Price: \$85,600.00



Short Description

Static billboard these days go unnoticed! LED Video Wall Billboards are vibrant and bold. 24/7 customer service and a 3 year manufacturing warranty.

Description

What is a Billboard without an LED Video Wall delivering multiple messages? The simple answer, is a static, one message billboard that you can only rent space to one advertiser. Capitalize on the money you've already spent for the steel structure and the labor to put it up, and add the ability to have several advertisements with the ability to push up illuminated single images OR full digital video on a grand scale. The entire point of a billboard is to grab the attention of the onlooker passing by. In the sea of billboards on the highways, how do you intend on doing that without LED? LED Video Walls are high impact, high-end and are extremely simple to connect too and we can cover your existing billboard with an experience that people talk about..

This is roughly a 14' x 48' system in 8mm quality. It's huge, waterproof and extremely vibrant! LED Wall Panels are changing the entire landscape of how different media is viewed. Seamless interlocking systems are quickly taking over the large format video world because of their ability to deliver video content on the largest format over any other system seamlessly and now their quality levels are undeniably gorgeous.

This system can be controlled up to 3 miles away directly, or over the web from anywhere.

If installation is needed, we have local techs and can estimate all costs up front so there

are no hidden fees for your budgeting purposes. We also offer service plans to maintain your system to ensure you get the most life out of your system. Just call us and ask for a free installation or service estimate.

Don't be fooled by manufacturers that do not offer warranties and long term service plans. We partner with our customers and are proud of how we serve focused on a long term and ever evolving future. We help our customers achieve the most out of their systems.

ITEM SPECIFICATIONS:

1. This is a 8mm system, which means the distance between each LED is 8mm so attendees should be 40' or more, away for optimal image clarity.
2. These panels can hot swap. This is an important cost saving fact. Many competing systems do not hot swap. Hot swap means if, for some reason something struck and damaged a panel and it needed replacing, hot swap allows you to just remove that one panel without having to take all the panels above it apart. This saves a lot of labor time and more importantly labor costs when replacing.

When buying from LED Tranquility you get the following with your system:

1. 3 year manufacturer warranty (INCLUDED) on all equipment (specific to manufacturing defects)
2. 24/7 customer service by phone (INCLUDED) with any of our trained LED Tranquility technicians (for the life of the product)
3. A hot swap system (INCLUDED) of superior quality that saves you money long term
4. Peace of mind that you bought from a great US based company that is here to support you

These systems come with full installation instruction and can be installed by experienced A/V technicians. IF YOU WANT LED TRANQUILITY TO INSTALL THIS SYSTEM FOR YOU (HIGHLY RECOMMENDED) PLEASE CALL FOR AN ESTIMATE AS ESTIMATES FOR INSTALLATION ARE BASED ON LOCATION AND CANNOT BE PRICED THROUGH A WEBSITE.


Specifications

LED VIDEO WALL (8 mm quality) - OUTDOOR BILLBOARD



EXAMPLE

Add or subtract panels to make any size needed!

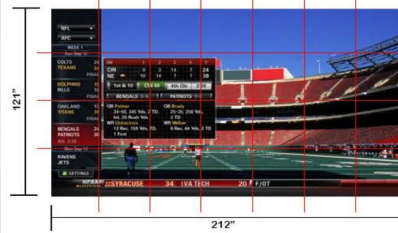

Per Panel Specifications

| Cabinet | | Size | 30.2362 inch x 30.2362 inch | LED Expected Life | greater than 100,000 hours |
|----------------|-------------------|---------------------------------|-----------------------------|--------------------|----------------------------------|
| LED Module | Resolution | 96 dots x 96 dots | | Input Voltage | 120V 1p to 220V 3p |
| | Weight | 36.3757 pounds | | Input Frequency | 50/60Hz |
| | Pixel Pitch (mm) | 8mm | | Power Consump | Max: 800w Avg: 270w |
| | Pixel Density | 15625 | | Refresh Rate | greater than 1920Hz |
| | Brightness | greater than 6000 | | Frame Rate | greater than 60 frames/sec |
| | Module Size | 10.0787 inch x 5.0394 inch | | Defect Rate | less than .0001 |
| | Resolution | 32 x 16 | | Humidity | 0 - 90% |
| | Weight | 0.7716 pounds | | Control Method | Video Processor or Computer |
| | Pixel Config | 1R1G1B | | Way of Drive | 1/4 scan |
| | Connector | Linco Brand | | MTBF | greater than 50,000 hours |
| | LED Lamp | SMD3535 | | Color Temp | 6500K |
| | Driver IC | MB15124 | | Color | greater than 16.7 million |
| Control System | Power Supply | G-energy | | Support Mode | VGA, 800x800 display |
| | Viewing Angle | 140 degrees | | Control Distance | 400 feet (optical up to 3 miles) |
| | Brightness | greater than 6000 | | Operating Platform | WINDOWS (98, 2000, XP, 7) |
| | Brightness Adjust | Manual, 256 level; Auto 8 level | | | |
| | Grey Scale | 256 Shades Per Color | | | |
| | Grey levels | 16 bits | | | |
| | Operating Temp | neg 20 Fahr to pos 140 Fahr | | | |

Individual Panels



Signal Connection

Power Connr



LED Tranquility[®]
THE TRUSTED SOURCE OF VIDEO WALL TECHNOLOGY